


PA970

All-in-one Rugged Mobile

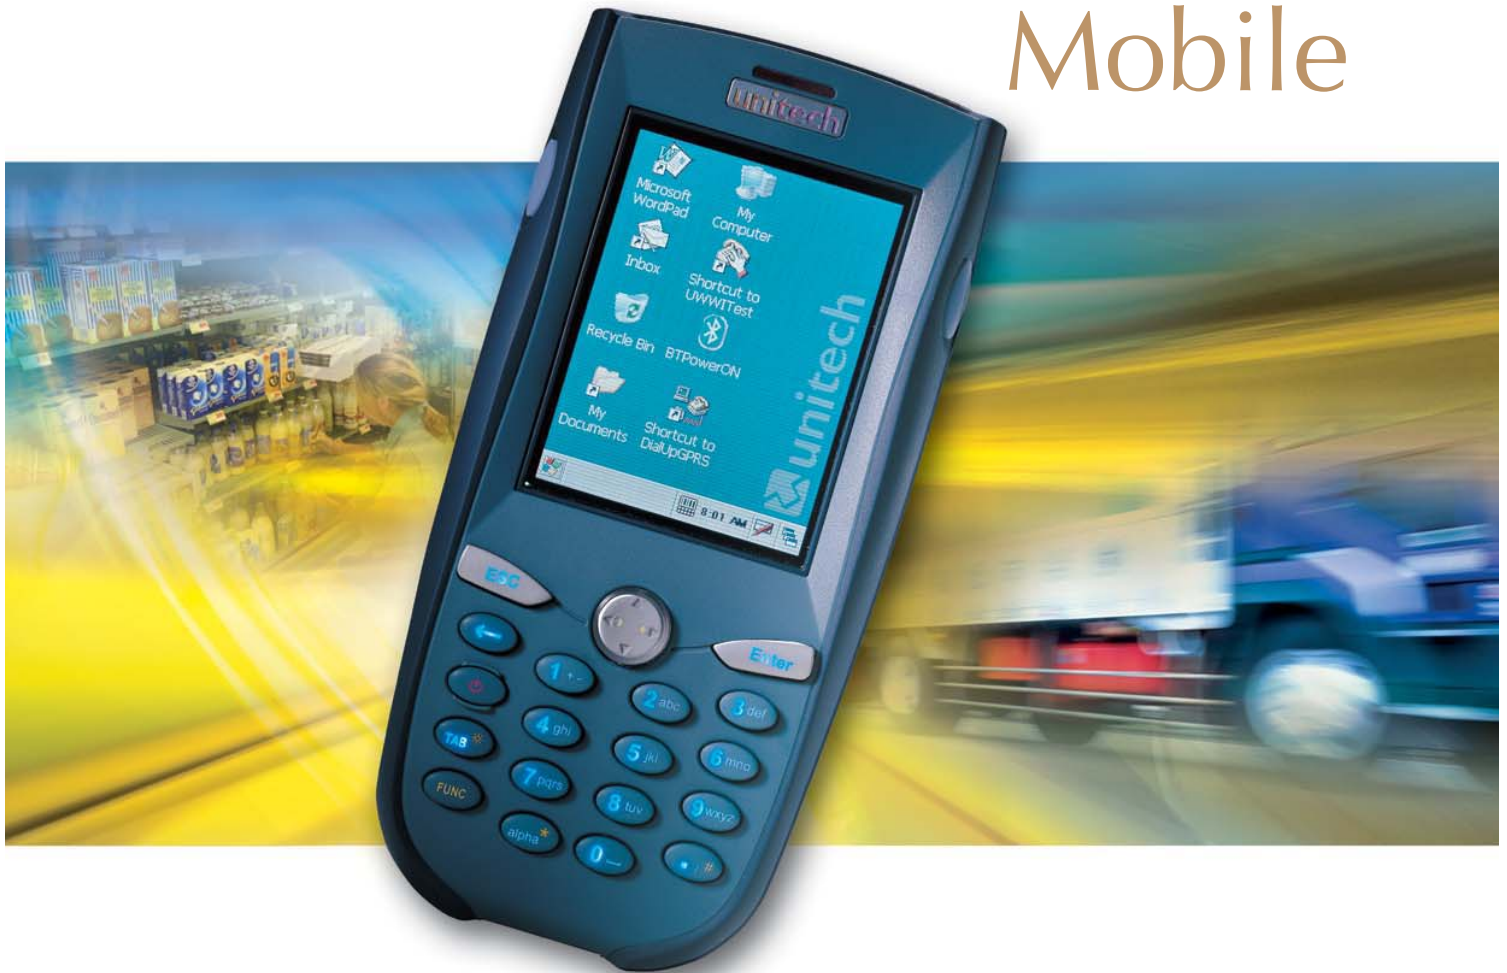

All-in one Mobile Computer

Because a Mobile Workforce in the field requires wireless connectivity in multiple environments, the PA970 is equipped with 3 radio options, GPRS, 802.11b and Bluetooth. GPRS is ideal for delivery vehicle real-time data transaction in the field. 802.11b is for communication in retail stores and distribution centers. Bluetooth capability allows wireless communication with peripheral devices such as printers.

Rugged Mobile Computer

The PA970 is compliant with IP54 to resist water & dust, and designed to meet 1.2 Meter drop test to minimize down time for Field Mobile Workforce.

Versatile Design for Data Collection

The PA970 offers 3 options for fast & accurate data collection. A 19 key keypad provides the numeric, alphanumeric and navigation keys critical for today's applications. Integrated Bar Code Scanners provide fast & accurate capture of bar code data. The touch screen is used for navigation and the input of graphical data such as signatures.

Main Features

- Microsoft WinCE.NET4.2 Professional Plus
- Intel X-Scale 400MHz Processor
- Built-in GPRS WLAN and Bluetooth
- Reflective TFT Color Screen provides brilliant & vivid display
- Built-in laser bar code scanner for fast & accurate data collection
- 19 key keypad includes numeric key, alpha key, and function key
- User controllable LCD and keypad backlight
- Double-cell rechargeable Li-Ion battery pack 7.4V 1850mAh
- IP54 sealed against rain and dust
- Survives 1.2M free drop to concrete floor-minimum down time

► Processing & Memory

Intel® X-Scale 400MHz
64MB SDRAM, 64MB Flash ROM

► Operating System

Windows® CE.NET 4.2 Professional Plus

► Keyboard

19-key keypad includes numeric, Function key and Alpha key and Scan buttons.
Keypad backlight

► Display & Touch Screen

240 x 320 color LCD with backlight and touch screen

► Barcode Scanning

Integrated liner bar code scanner

► Interface

RS232, USB Client.

► Expansion Slot

One SD/ MMC slot

► Wireless Communication

GPRS Class 2, SMS over GPRS
802.11b
Bluetooth V1.1 compliant

► Power Supply & Management

Rechargeable Li-Ion 7.4V @ 1850mAH main battery
Rechargeable backup battery, 2.7V @ 40mAH two cell

► Enclosure

Size: 182mm x 88mm x 37mm
Weight: 440gm

► Environmental

Operating temperature range: -10°C to 50°C
Storage temperature range: -20°C to 60°C
Drop specification: 1.2 meter to concrete
Dust & water protection enclosure rating: IP 54

► Regulatory

CE , FCC , BSMI , VCCI , DGT and TELEC

► Accessories

Desktop Cradle
Car Kit
4 Slot Multi-bay
2 slot Battery Charger
4 Slot Battery Charger
RS232 Cable
USB cable



Unitech America

Los Angeles Miami Mexico
<http://www.ute.com> <http://latin.unitech-adc.com>
e-mail: inquiry@ute.com e-mail: info@latin.unitech-adc.com

Unitech APAC

Taipei <http://www.unitech-adc.com> e-mail: aidsales@adc.unitech.com.tw

Unitech Japan

Tokyo <http://www.unitech-japan.co.jp> e-mail: sales@unitech-japan.co.jp

Unitech Europe

Tilburg / NL <http://www.unitech-europe.com> sales@unitech-europe.com
Swindon / UK <http://www.unitech-europe.co.uk>
e-mail: sales@unitech-europe.co.uk

Unitech Greater China

Beijng Suzhou Shanghai NingPo Guang Zhou Xiamen
<http://www.ute.com.cn> <http://www.ute.cn> unitech@ute.com.cn
Taipei <http://adc-utt.unitech.com.tw> barcode@unitech.com.tw

Head Office

<http://www.unitech-adc.com> e-mail: marketing@adc.unitech.com.tw